
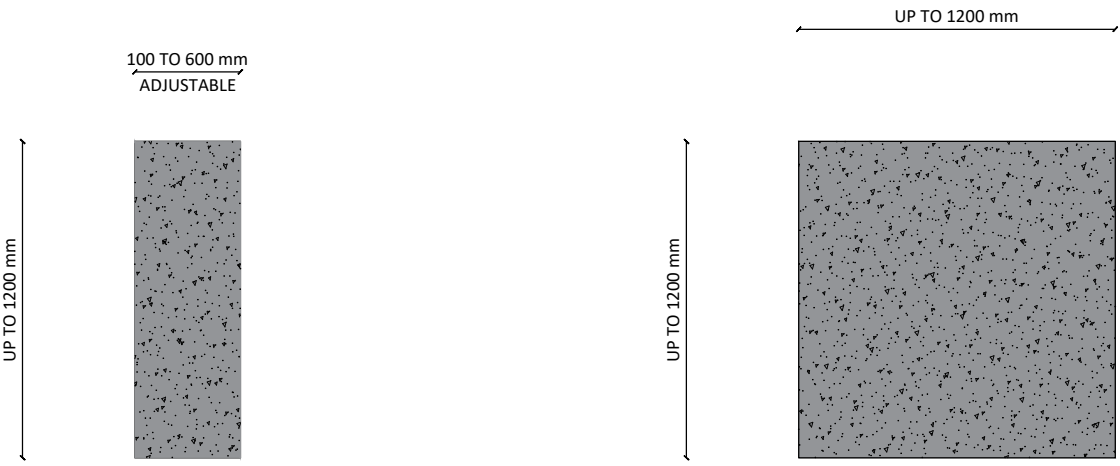



TYPICAL BEAM SHAPES

UP TO 13 m LENGTH (OVER 13 m LENGTH SPECIAL TRANSPORT
REQUIRED, BUT IS AVAILABLE)

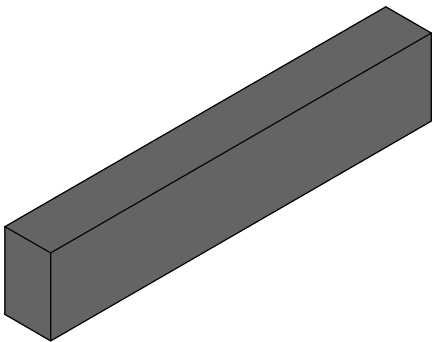


RECTANGULAR - SHAPE BEAM

RECTANGULAR - SHAPE BEAM

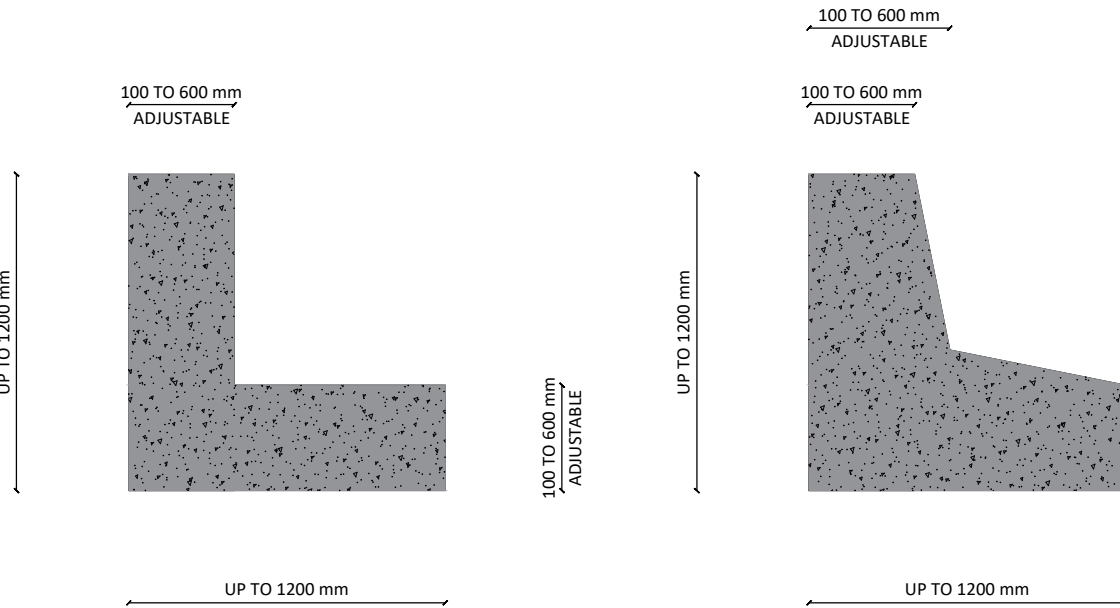

L - SHAPE BEAM


L - SHAPE BEAM WITH CURVE

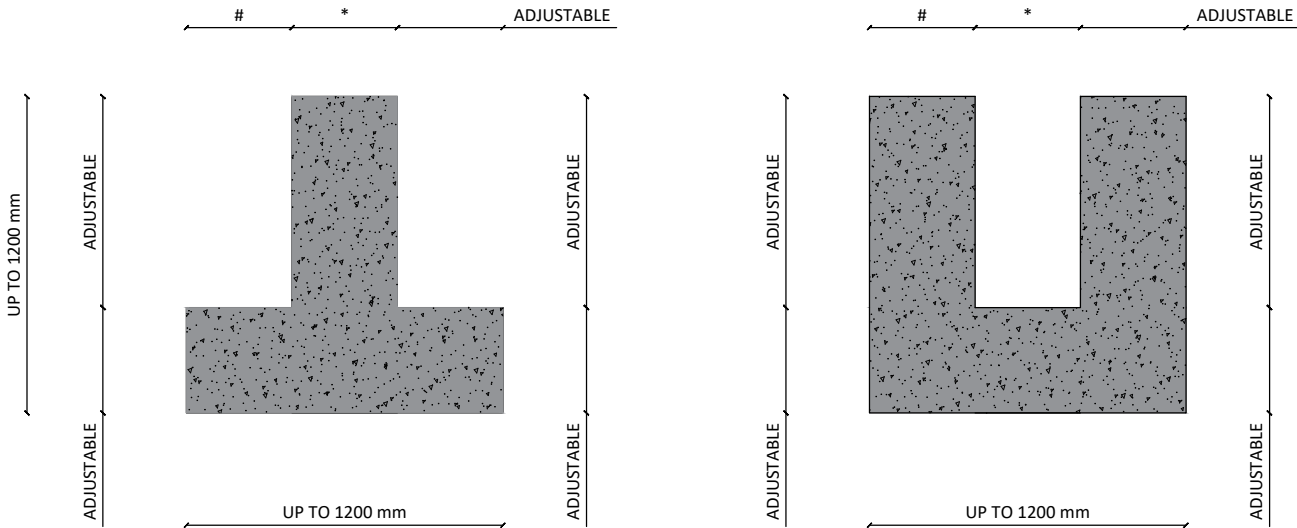


INVERTED T - SHAPE BEAM

U - SHAPE BEAM


TYPICAL BEAM EDGE PROFILES




15 x 15 mm 45 ° CHAMFER




25 x 25 mm 45 ° CHAMFER



Ø 20mm RADIUS / BULLNOSE



UN-EQUAL LEG CHAMFER



SQUARE CORNER