Cape Concrete Works (Pty) Ltd.
Wimbledon Road, Blackheath, Cape Town, South Africa
capeconcrete.com
info@capeconcrete.com
021 905 1200

CAPE CONCRETE CURVED BUS SHELTER - SHEET 3 OF 6

Drawing no.	CCW - CBS - 003	
Scale:	1 : 20	Sheet Size: A 3

CAPE CONCRETE CURVED BUS SHELTER

WEIGHT PER UNIT:	2192 kg Each
CONCRETE VOLUME:	0.895 m³
CONCRETE MIX:	25 MPa
REINFORCING:	SEE DRAWING NO. CCW - CBS - 004

CAPE CONCRETE CURVED BUS SHELTER BASE

WEIGHT PER UNIT:	2200 kg Each
CONCRETE VOLUME:	0.900 m³
CONCRETE MIX:	25 MPa
REINFORCING:	SEE DRAWING NO. CCW - CBS - 005

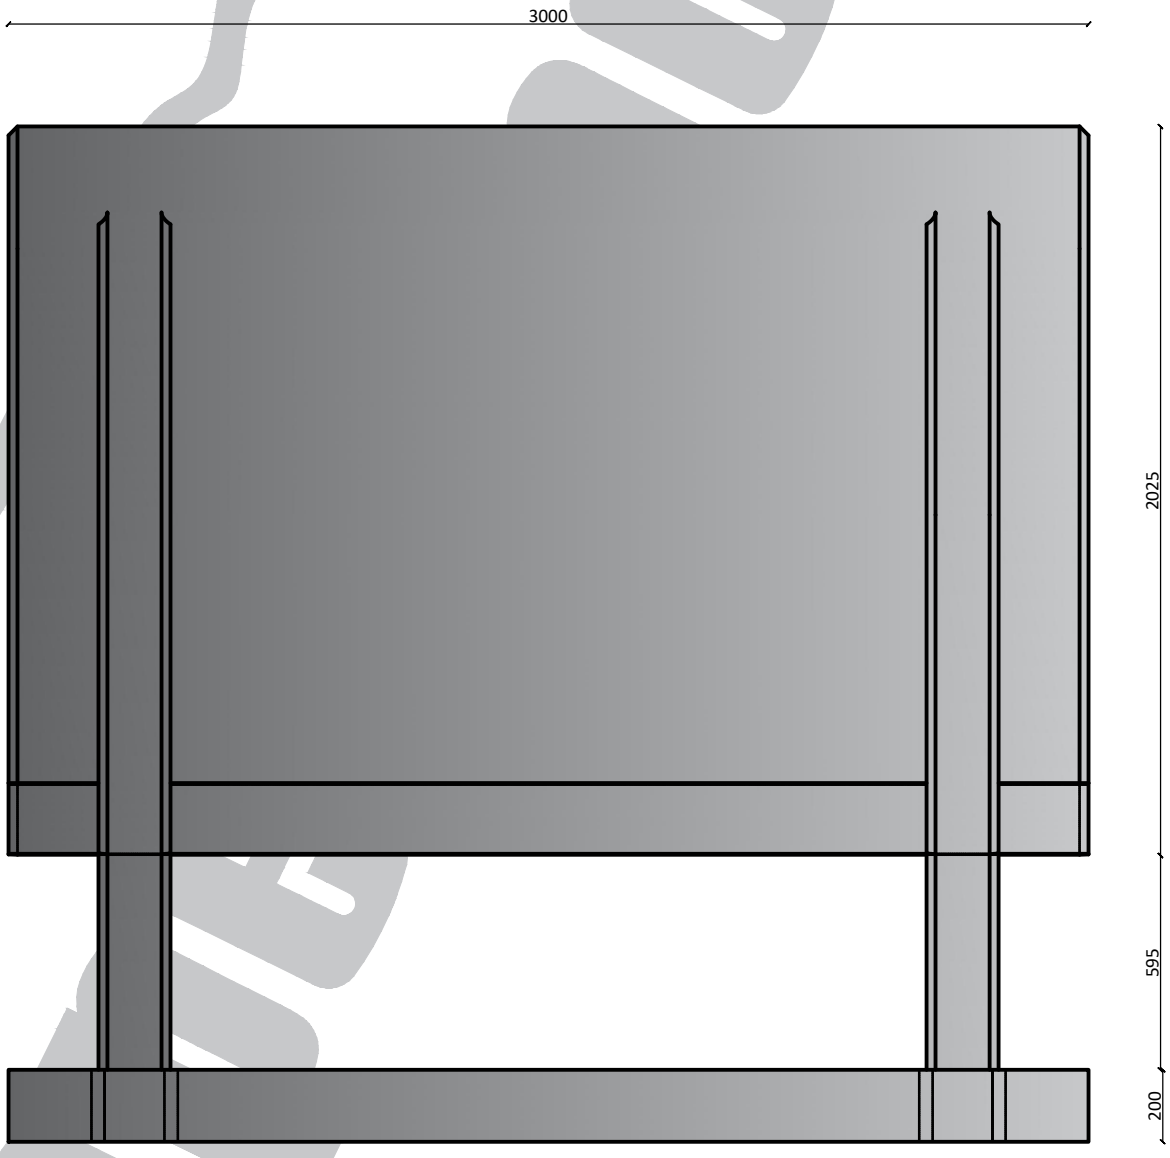

FRONT VIEW